


G135-7000 Finish(C)

G135-8000 Finish(C)



## Specifications

### Features

- 1.8 GPM Flow Rate
- 360° Swivel Spout
- Includes Metal Supply Nuts
- 3-Hole Installation (7000 Only)
- 4-Hole Installation (8000 Only)
- Includes Matching Side Spray (8000 Only)
- Quick Connect Side Spray (8000 Only)
- Chrome Spray (only for 8000 Only)
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



## Dimensions

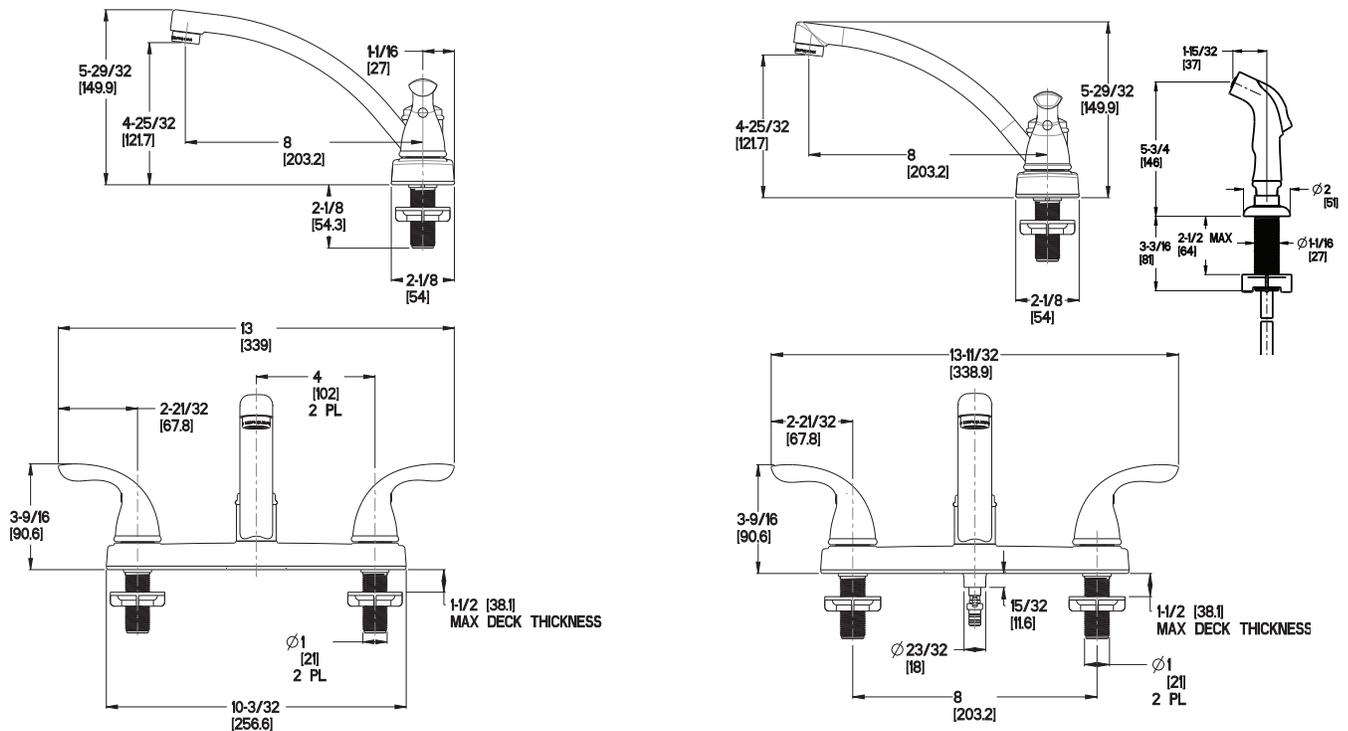

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings