

# 5225-I

Duplex Style Single-Pole / 5-15R Combination Switch


15 Amp, 120 Volt, Duplex Style Single-Pole / 5-15R AC Combination Switch, Commercial Grade, Grounding, Side Wired, - Ivory

With Leviton's extensive assortment of combination devices, you can fill a one-gang space with two switches, a switch and receptacle, even a switch and GFCI. From sensor guide lights to multi-purpose styles and Tamper-Resistant receptacles, we accommodate your every need. These devices come in a range of colors and are backed by a limited two-year warranty. Built to last and designed to save space, these attractively styled devices are at home in any setting.



UPC Code : 078477226605

Country Of Origin : Mexico



Available Colors :



## Technical Information

AC Horsepower Ratings

**HP Rating** : 1/2HP-120V

**Max. Amperage** : 12 Amp

Electrical Specifications

**Dielectric Voltage** : Withstands 1500V for 1 minute

**Grounding** : Grounding

**Overload UL20 Test** : 100 cycles of OL at 4.8 times rated current

**Receptacle Amperage** : 15 Amp

**Receptacle Voltage** : 125V AC

**Switch Amperage** : 15 Amp

**Switch Voltage** : 120V AC

**Temperature Rise** : Maximum 30 degrees C rise

Environmental Specifications

**Flammability** : Rated V-2 per UL 94

**Operating Temperature** : -40°C to 65°C

Material Specifications

**Actuator Material** : Thermoplastic

**Body Material** : Thermoplastic

**Color** : Ivory

**Strap Material** : Steel

Mechanical Specifications

**Product ID** : Stamped on Strap

## Features and Benefits

- AC quiet switches have silver-cadmium oxide contacts and receptacles have double-wipe contacts for maximum conductivity
- All devices have grounding screw
- Side wired with terminal screws that accept up to #12 copper or copper-clad wire
- Fit standard wallboxes
- Break-off tabs on devices with AC quiet switches permit conversion to separate feeds
- Backed by a Limited Two-Year Warranty

**Terminal Accom.** : 14-12 AWG

**Terminal ID** : Brass-Hot Black-Hot White-Neutral Green-Gnd

**Termination** : Side

**Torque Range** : 12-14 inch pounds

Product Features

**Amperage** : 15 A

**Color** : Ivory

**Feature** : Single-Pole / 5-15R

**NEMA** : 5-15R

**Product Type** : Switch/Outlet Combo

**Type** : Duplex Style Combination Switch

**Voltage** : 120 VAC

Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 111** : File #152105


**NEMA** : WD-1 & WD-6

**NOM** : 057

**UL Standard** : UL 20

**Warranty** : 2-Year Limited

## Dimensional Diagram

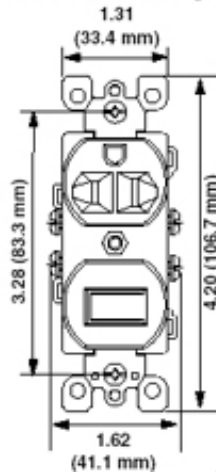

### SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

#### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

