

## 1451-2I

15 A, 120 V, Interruptor de palanca silencioso de CA de un polo con marco, uso residencial, conexión a tierra, Con cableado a presión y lateral Quickwire, - Marfil

Con diseños de palanca de eficacia comprobada, los interruptores silenciosos de CA de grado residencial de Leviton cubren todas las bases; se instalan fácilmente y están disponibles en versiones estándar e iluminadas. Las palancas y los marcos se fabrican en termoplástico resistente a impactos y cuentan con tornillos de cabeza grande endurecidos de cabezal triple para una instalación fácil. Los interruptores tradicionales de Leviton son compatibles con una amplia gama de placas de pared plásticas y metálicas de Leviton.



Color :  Marfil

Código UPC : 078477772713

País de origen : Contáctese con el servicio al cliente.

### Información técnica

Características del producto

**Amperaje** : 15 A

**Característica** : Con marco

**Clasificación de CV** : 1/2HP-120V

**Color** : Marfil

**Conexión a tierra** : Conexión a tierra

**Finalización** : A presión y lateral Quickwire

**Garantía** : limitada a 2 años

**Material de la correa** : acero

**Material del actuador** : Termoplástico

**Material del cuerpo** : Termoplástico

**Máx. Amperaje** : 12 A

**Normas y certificaciones** : UL/CSA

**Voltaje** : 120 V


### Características y beneficios

- Instalación más rápida con combinación de cableado lateral y a presión Quickwire
- Quickwire acepta conductores de hasta n.º 14 AWG.
- El cable lateral acepta conductores de hasta n.º 12 AWG.
- Tornillos de combinación de cabeza grande de triple accionamiento (estándar, Phillips, Robertson) para una instalación rápida del cableado
- Palanca y marco de termoplástico duradero resistente a impactos
- Cuenta con una garantía limitada de dos años

### Available Colors :



### Dimensional Diagram



### ENGLISH

#### TO INSTALL:

**WARNING:** TO BE INSTALLED AND/OR USED IN ACCORDANCE WITH APPROPRIATE ELECTRICAL CODES AND REGULATIONS.

**WARNING:** IF YOU ARE NOT SURE ABOUT ANY PART OF THESE INSTRUCTIONS, CONSULT AN ELECTRICIAN

**CAUTION:** USE THIS DEVICE WITH COPPER OR COPPER CLAD WIRE ONLY.

- WARNING:** TO AVOID FIRE, SHOCK, OR DEATH; TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!
- Remove insulation per strip gauge on device [about 5/8" (1.6 cm)].
- Connect wires per WIRING DIAGRAM as follows:

#### To Side Wire:


Loop wires clockwise 3/4 turn around terminal screws. GREEN or BARE (Ground) wire to GREEN screw, BLACK (Hot) wire to any terminal screw, other BLACK wire to remaining terminal screw. Firmly tighten screws over wire loops. Terminal screws accept up to #12 AWG copper or copper clad wire.

#### To Quickwire™:

Insert straight #14 AWG solid copper or copper clad wires into round Quickwire™ holes. Quickwire™ terminals accept #14 AWG solid copper or copper clad wires ONLY! For circuits with #12 AWG solid copper or copper clad wires, use terminal screws instead. To replace or rewire after Quickwiring, gently press the tip of a small screwdriver in the release slot and back the wire out gradually.

- Mount device using long mounting screws. Attach wallplate (not included).
- Restore power at circuit breaker or fuse. Installation is complete.


### WIRING DIAGRAM SCHÉMA DE CÂBLAGE DIAGRAMA DE CABLEADO

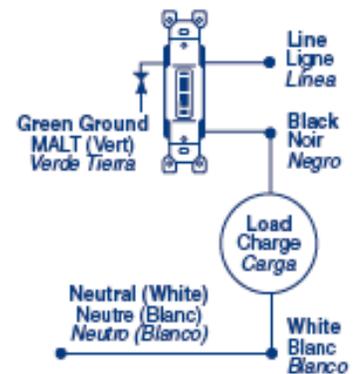

STRIP GAGE  
GABARIT DÉNUDAGE  
MEDIDA DE PELADO

5/8" (1.6 cm)  
1.6 cm (0.625 po)  
1.6 cm (5/8")

### Wiring Diagram Single Pole



## SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

